

O-ring installation kit assortment 11 pieces in system case 4.4.1.

Round cord diameter: 1 mm, 2 mm, 3 mm, 4 mm, 5 mm, 6 mm, 7 mm, 8 mm, NBR 70

- For the quick and easy manufacture of O-rings
- NBR is a chemical designation: Nitrile butadiene rubber (brands, e.g. Europrene®, Krynac®, Nipol®, Perbunan®, Breon®)
- Temperature resistance: -30 °C to +100 °C
- Media resistance: Oil, petrol, grease, aliphatic hydrocarbons (propane, butane, mineral oils), diluted acids and alkalis



Material	NBR (Nitrile Butadiene Rubber)
Colour	Black
System dimensions	4.4.1
Number of pieces in assortment/set	11 PCS
Product weight (per item)	1807.1 g
RoHS-compliant	Yes




Art. no. 5964 046 809

P. Qty.: 1

Details/Application

Boat yards, mechanical engineering, freight operations, vehicle repair shops, agricultural machinery and motorbike repair shops, bus companies etc.

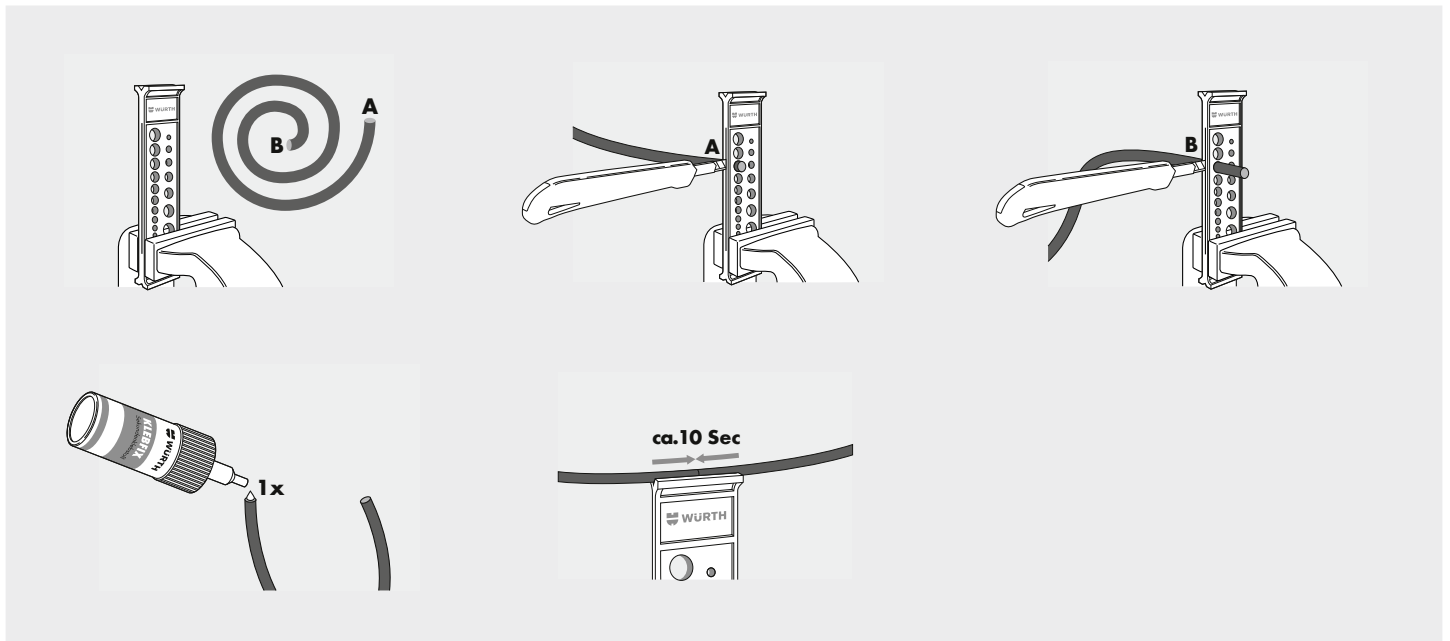

Notice

DIN ISO 3302-1, tolerance class E1 applies to dimensional tolerance

Contents for art. no. 5964 046 809		
Designation	Art. no.	Quantity
O-ring cutting jig Black	0468 101	1
Black NBR70 round cord Diameter 1 mm	0468 111 1	1
Black NBR70 round cord Diameter 2 mm	0468 112 0	1
Black NBR70 round cord Diameter 3 mm	0468 113 0	1
Black NBR70 round cord Diameter 4 mm	0468 114 0	1
Black NBR70 round cord Diameter 5 mm	0468 115 0	1
Black NBR70 round cord Diameter 6 mm	0468 116 0	1
Black NBR70 round cord Diameter 7 mm	0468 117 0	1
Black NBR70 round cord Diameter 8 mm	0468 118 0	1
1 C cutter knife with slider Length 140 mm; Blade width 9 mm	0715 66 060	1
Klebfix superglue 19 ml	0893 09	1
System case 4.4.1 Width x depth x height (external dimension) 371 x 278 x 87 mm		1