

Lining tape

For glazing of windows, doors and fixed glazing

62


- Compressible
- Prevents three-point adhesion
- Self-adhesive
- Fills glazing rebates and reduces sealant consumption
- Acts as motion-damping section under heavy wind loads
- Very fine, uniform, completely closed cell structure
- Decorative, smooth surface
- Highly elastic
- High mechanical values with low volume weight
- Excellent chemical resistance
- Highly resistant to weathering
- Excellent thermal insulation values
- Shelf life: 12 months if stored in a cool, dry place
- Outstanding UV resistance
- Compatible with acrylic glass



Chemical basis	Closed-cell polyethylene foam
----------------	-------------------------------

Colour	Overall thickness	Width	Length of roll	Art. no.	P. Qty.
Grey	2 mm	9 mm	20 m	0875 709 02	100
Grey	2 mm	12 mm	20 m	0875 712 02	100
Grey	2 mm	15 mm	20 m	0875 715 02	100
Grey	3 mm	9 mm	20 m	0875 709 03	100
Grey	3 mm	12 mm	20 m	0875 712 03	100
Grey	3 mm	15 mm	20 m	0875 715 03	100
Grey	4 mm	9 mm	20 m	0875 709 04	100
Grey	4 mm	12 mm	20 m	0875 712 04	100
Grey	4 mm	15 mm	20 m	0875 715 04	100
Grey	5 mm	9 mm	10 m	0875 709 05	100
Grey	5 mm	12 mm	10 m	0875 712 05	100
Grey	5 mm	15 mm	10 m	0875 715 05	100
White	2 mm	9 mm	20 m	0875 809 02	100
White	3 mm	9 mm	20 m	0875 809 03	100
White	3 mm	12 mm	20 m	0875 812 03	100
White	4 mm	9 mm	20 m	0875 809 04	100

Technical Information

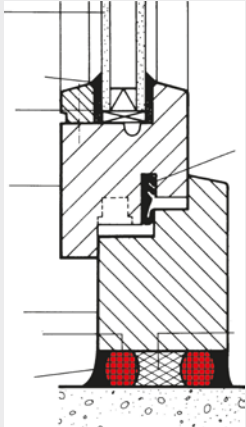

Instructions

- The processing temperature should not be below +5°C.
- The surface must be dry and free from dust, oil and grease.
- The lining tape should be used in connection with an edge sealant.

Notice

Without cover film

The usage instructions are recommendations based on the tests we have conducted and based on our experience; carry out your own tests before each application. Due to the large number of applications and storage and processing conditions, we do not assume any liability for a specific application result. Insofar as our free customer service provides technical information or acts as an advisory service, no responsibility is assumed by this service except where the advice or information given falls within the scope of our specified, contractually agreed service or the advisor was acting deliberately. We guarantee consistent quality of our products. We reserve the right to make technical changes and further develop products.