

# Blind Rivets



## Round pan head

**Sleeve: Galvanized steel, blue passivated (A2K)**  
**Pin: Galvanized steel, blue passivated (A2K)**

### Mid-strength riveting range

- Insertion bevels.
- Unique shaping behavior.
- Pin engagement.
- Greater mechanical strengths compared to conventional blind rivets.

d x l	Drill hole dia.	Clamping range	dk	k	dm	Shear fract. load in N	Tens. fract. load in N	Art. No.	P. Qty.
in mm	in mm	in mm	in mm	in mm	in mm				
3.2 x 7.0	3.3 – 3.4	1.0 – 3.0	6.5	1.2	2.0	1,200	1,300	<b>0913 232 30</b>	500
3.2 x 9.0	3.3 – 3.4	3.0 – 5.0	6.5	1.2	2.0	1,750	1,300	<b>0913 232 50</b>	500
4.0 x 7.5	4.1 – 4.3	1.0 – 3.0	7.7	1.3	2.6	2,400	2,800	<b>0913 240 30</b>	500
4.0 x 9.5	4.1 – 4.3	3.0 – 5.0	7.7	1.3	2.6	3,500	2,800	<b>0913 240 50</b>	500
4.0 x 12.5	4.1 – 4.3	5.0 – 7.0	7.7	1.3	2.6	4,100	2,800	<b>0913 240 70</b>	500
4.8 x 9.0	4.9 – 5.1	1.5 – 3.5	9.2	1.3	3.0	3,600	3,800	<b>0913 248 35</b>	500
4.8 x 11.5	4.9 – 5.1	3.5 – 6.0	9.2	1.3	3.0	4,200	3,800	<b>0913 248 60</b>	500
4.8 x 14.5	4.9 – 5.1	6.0 – 8.5	9.2	1.3	3.0	5,600	3,800	<b>0913 248 85</b>	500
4.8 x 19.5	4.9 – 5.1	9.0 – 13.5	9.2	1.3	3.0	6,000	3,800	<b>0913 248 195</b>	250

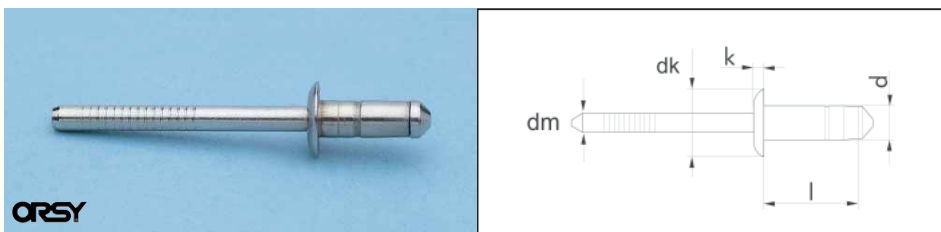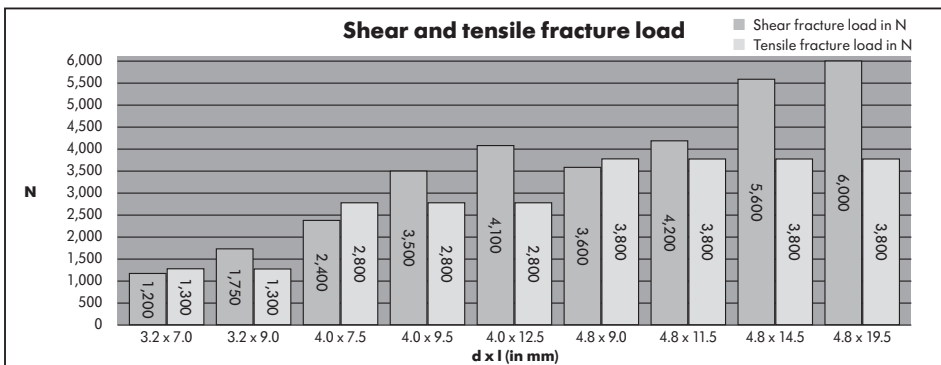

# Blind Rivets

## Round pan head

**Sleeve: A2 Stainless steel**  
**Pin: A2 Stainless steel**

- Insertion bevels.
- Unique shaping behavior.
- Pin engagement.

d x l	Drill hole dia.	Clamping range	dk	k	dm	Shear fract. load in N	Tens. fract. load in N	Art. No.	<small>Fuji Proof</small>	P. Qty.
in mm	in mm	in mm	in mm	in mm	in mm					
3.2 x 7.0	3.3 – 3.4	1.0 – 3.0	6.5	1.2	2.0	1,600	2,000	<b>0913 32 30</b>		100/500
3.2 x 9.0	3.3 – 3.4	3.0 – 5.0	6.5	1.2	2.0	1,600	2,000	<b>0913 32 50</b>		100/500
3.2 x 12.5	3.3 – 3.4	5.0 – 7.0	6.5	1.2	2.0	1,600	2,000	<b>0913 32 70</b>		100/500
4.0 x 7.5	4.1 – 4.3	1.0 – 3.0	7.7	1.3	2.6	5,200	4,000	<b>0913 40 30</b>		100/500
4.0 x 9.5	4.1 – 4.3	3.0 – 5.0	7.7	1.3	2.6	5,200	4,000	<b>0913 40 50</b>		100/500
4.0 x 12.5	4.1 – 4.3	5.0 – 7.0	7.7	1.3	2.6	5,200	4,000	<b>0913 40 70</b>		100/500
4.8 x 9.0	4.9 – 5.1	1.5 – 3.5	9.2	1.3	3.0	5,500	5,000	<b>0913 48 35</b>		100/500
4.8 x 11.5	4.9 – 5.1	3.5 – 6.0	9.2	1.3	3.0	5,500	5,000	<b>0913 48 60</b>		100/500
4.8 x 14.5	4.9 – 5.1	6.0 – 8.5	9.2	1.3	3.0	5,500	5,000	<b>0913 48 85</b>		100/500

