WÜRTH

TWO-HAND ANGLE GRINDER

Special Features for EWS 24 -180 / EWS 24 -180 - S / EWS 24 - 230 / EWS 24 - 230 - S

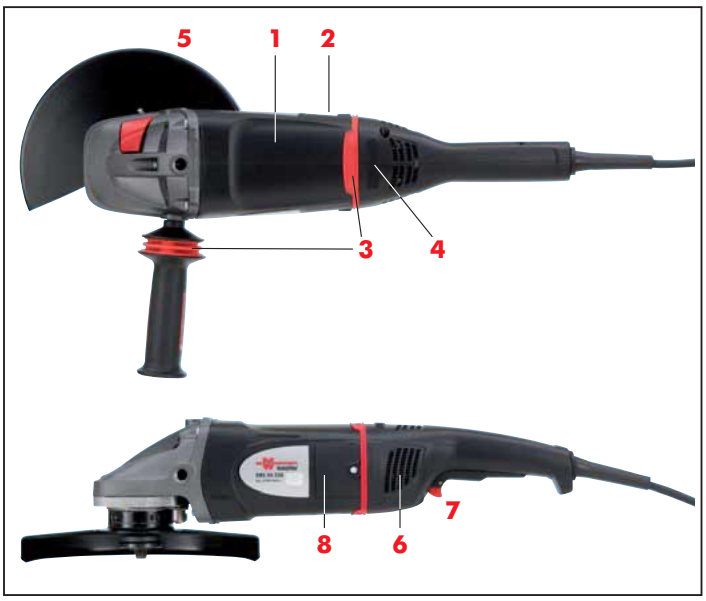

1 2,400 W high-performance motor guarantees continuous optimum performance.
2 Very slim housing makes it easier to work with the angle grinder.
3 Vibration damping of handle and additional handle for noticeably more comfortable work.
4 LED illuminates in case of overload or if the restarting protection is triggered.
5 Protective hood can be adjusted without tools for quick and effective work.
6 The cooling air is sucked in at the rear ventilation slits and blown out at the gear head in the front. This allows only minimal grinding dust to reach the motor compartment.
7 On/Off switch with intelligent electronics. For the functions:
– Restarting protection
– Recoil protection
– Overload protection
– Gentle startup
8 Optimized dust-protection concept.
Double labyrinth seals for ball bearings and encapsulated switch reliably keep grinding dust at bay.



Overload protection

Auto Stop recoil protection

Conventional motor

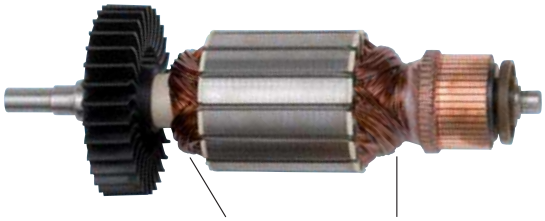

Motor winding without guard

EWS 24 motor

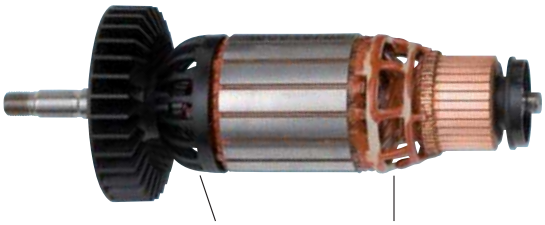

Plastic grills for protection against grinding particles

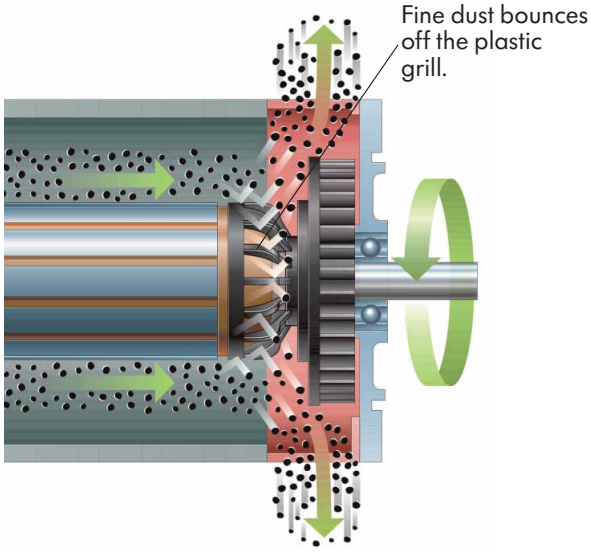

A defective motor is the number one reason for angle grinder failure!
The plastic grills on the motor reliably keep sucked-in grinding dust at bay. The dust bounces off as it should and cannot damage the sensitive windings.

MWF - 07/10 - 06034 - © •