


DRILLING STANDS

Technical information for DS COMPACT and DS COMFORT


DS COMPACT*

Fig. 1



DS COMFORT**

Fig. 2

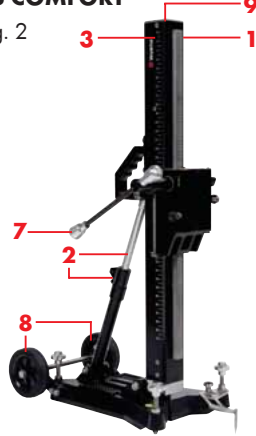

*Figure shows DS COMPACT with DS 130-P/DS 130-T Carriage

**Figure shows DS COMFORT with DS 300 Carriage



Unit elements

- 1 Aluminum column with dovetail guide and carrying handle
- 2 Engraved drilling angle indicator (max. 45°) with quick closure
- 3 Engraved drilling depth indicator
- 4 Drilling center indicator
- 5 Bubble levels
- 6 Knurled set screws with additional hexagon head
- 7 Drill spindle with quick-change connection; mountable on either side of carriage; features integrated wrench for the knurled set screws.
- 8 Wheels and tipping axle for easier transport
- 9 Inside thread for stamping device

DS COMPACT accessories

Image	Designation	Art. No.	P. Qty.
4	Small Water Collecting Ring for DS 130-P/DS 130-T, DS 164 for 8 - 66 mm bits, incl. rubber cap	5709 141 010	1
-	Spare Rubber Cap for 8 - 66 mm bits	5709 141 011	1
5	Large Water Collecting Ring for DS 130-P/DS 130-T, DS 164 for 50 - 131 mm bits, incl. rubber cap	5709 141 020	1
-	Spare Rubber Cap for 50 - 131 mm bits	5709 141 021	1
6	Vacuum Set incl. rubber seal for attachment of the drilling stand to a vacuum pump	5709 141 100	1

DS COMFORT accessories

Image	Designation	Art. No.	P. Qty.
4	Small Water Collecting Ring for DS 130-P/DS 130-T, DS 164 for 8 - 66 mm bits, incl. rubber cap	5709 141 010	1
-	Spare Rubber Cap for 8 - 66 mm bits	5709 141 011	1
5	Large Water Collecting Ring for DS 130-P/DS 130-T, DS 164 for 50 - 131 mm bits, incl. rubber cap	5709 141 020	1
-	Spare Rubber Cap for 50 - 131 mm bits	5709 141 021	1
7	Small Water Collecting Ring for DS 300 for 50 - 131 mm bits, incl. rubber cap	5709 142 010	1
-	Spare Rubber Cap for 50 - 131 mm bits	5709 141 021	1
8	Large Water Collecting Ring for DS 300 for 120 - 270 mm bits, incl. rubber cap	5709 142 020	1
-	Spare Rubber Cap for 120 - 270 mm bits	5709 142 021	1
9	Vacuum Set incl. rubber seal for attachment of the drilling stand to a vacuum pump	5709 142 100	1

Other Accessories

Image	Designation	Art. No.	P. Qty.
10	VP 800 Vacuum Pump for the attachment of the drilling stands in conjunction with the respective optional vacuum set. Can be used on smooth surfaces. The base plate does not need to be anchored thanks to the suction plate. Voltage: 230 V, max. vacuum pressure: 1,000 mbar	5709 131 0	1
11	Stamping Device Attachment for clamping the drilling stands	5709 151 200	1
12	Clamp Support with clamping range 1.85 - 3.4 m	5709 151 300	1
13	Water pressure tank for drilling work without a water connection at the construction site. Pressure gauge for tank pressure (max. 6 bar). Fill volume: 10 L, hose length: 2.5 m. Safety valve against overpressure and for relieving residual pressure. Large filling funnel	0651 150 205	1
14	Industrial Wet and Dry Vacuum ISS 55-S Automatic	0701 156 0	1



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 8



Fig. 9



Fig. 10



Fig. 11



Fig. 12



Fig. 13



Fig. 14