



Endless Clamping Strap/Closing Loop

For producing hose and pipe clamps of almost any size in conjunction with tensioning and cutting tool.

Application


- For installing signs, boards, switchboxes etc. (in conjunction with sign holders).
- For tying in hoses.



- Fully rounded edges.
 - Material V2A, 1.4301.
 - Tensile strength at least 600 N/mm².
- With higher loading, install tensioning strap double.

Width in inches	in mm	Tensioning Strap		P. Qty.	Closing Loops	
		Thickn. in mm	Art. No.		Art.-Nr.	P. Qty.
3/8	9	0.63	0529 1 09	1	0529 2 09	100
1/2	12	0.76	0529 1 12		0529 2 12	
5/8	16	0.76	0529 1 16		0529 2 16	
3/4	19	0.76	0529 1 19		0529 2 19	

1 pc. = 1 roll of 30 m each in display carton

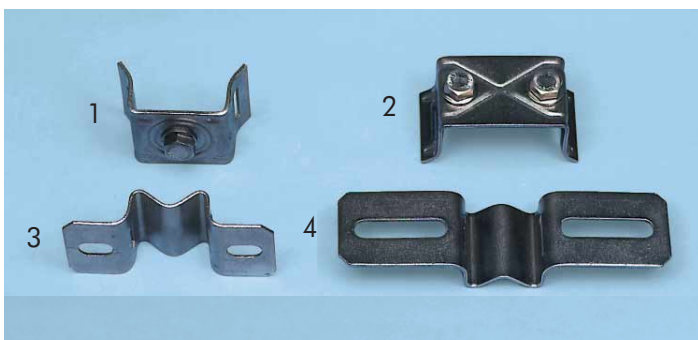

Sign Holder

Material: V2A, 1.4301.

Fig.	Designation	Design	Thickn. in mm	Art. No.	P. Qty.
1	Sign holder, offset	Offset leg, with washer, 1 screw, M8 (DIN 933)	2.0	0529 3 01	10
2		Offset leg, with washer, 2 screws, M8 (DIN 933)	2.0	0529 3 02	
3	Sign holder, oblong hole	Length 90 mm, oblong hole 9x15 mm, hole spacing 50-70 mm with M8	2.0	0529 3 090	
4		Length 140 mm, oblong hole 9x40 mm, hole spacing 60-120 mm with M8	2.0	0529 3 140	



Tensioning and Cutting Tool

Drop-forged tool which can exert a tensile force of up to 10 kN on the tensioning strap.

Art. No. 0529 5

P. Qty. 1